



TOP VIEW

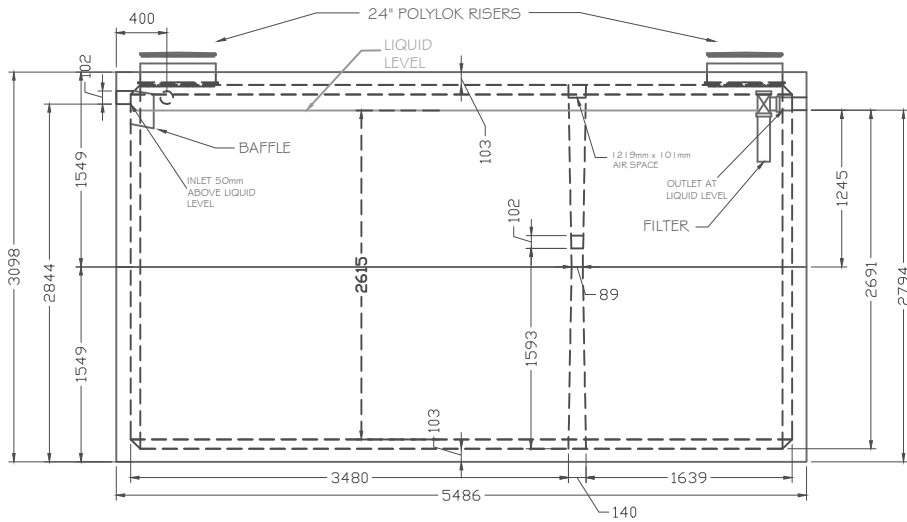

SIDE VIEW

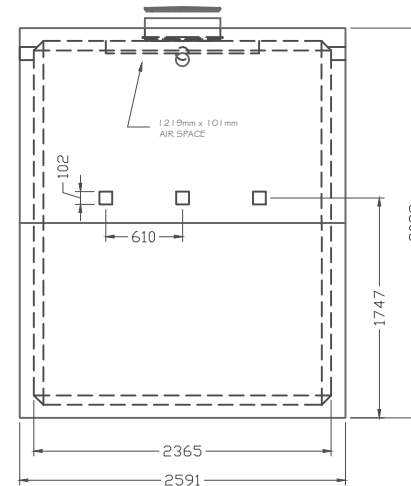

END VIEW

GENERAL:

ALL DIMENSIONS IN MILLIMETERS
+/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:

STANDARD
STANDARD ACC (ACCELERATED STRIPPING)
10 MPa @ STRIPPING STRENGTH
35 MPa @ 28 DAYS
C-1 EXPOSURE CLASS
SULPHATE RESISTANT
6.2 CUBIC YARDS (BOTTOM HALF)
6.2 CUBIC YARDS (TOP HALF)

REINFORCING:

ALL REINF. HAS MIN. 25mm OF COVER

TANK:

10M @ 300mm O/C EW

LID:

10M @ 300mm O/C EW

CORNER BARS AROUND RISERS

WEIGHT:

TOP SECTION APPROX. - 21,150 LBS/9614 KG
BTM SECTION APPROX. - 21,520 LBS/9782 KG
ASSEMBLED APPROX. - 42,670 LBS/19,396 KG

NOTES:

DIVIDER WALL IS MONOLITHIC CAST
JOINT SEALANT IS MASTIC SEALANT (CONCEAL CS-102)
(NSF APPROVED SEALANT AVAILABLE FOR PORTABLE
WATER HOLDING TANKS)
TANK ASSEMBLED ON SITE
1.5M MAXIMUM BURIAL
INLETS ARE 4\"/>



PRODUCT:

7290 GAL/33,105 L SEPTIC TANK

PRODUCT ID:

STC 7290

CONTRACTOR:

SCALE:

N.T.S

REV	DATE	INI.	DESCRIPTION
0	03/23/ 20	LP	ORIGINAL DRAWING