



TOP VIEW

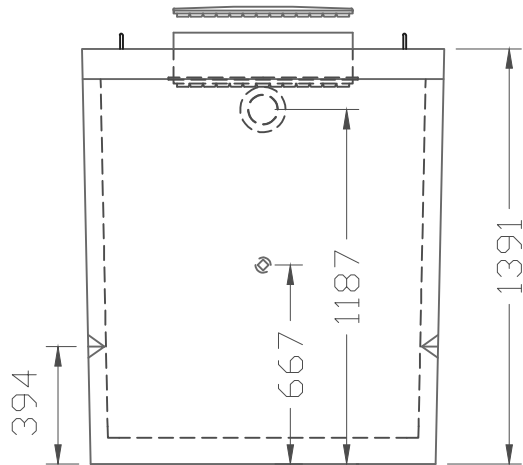

SIDE VIEW (1)

24" POLYLOK  
LID AND RISER

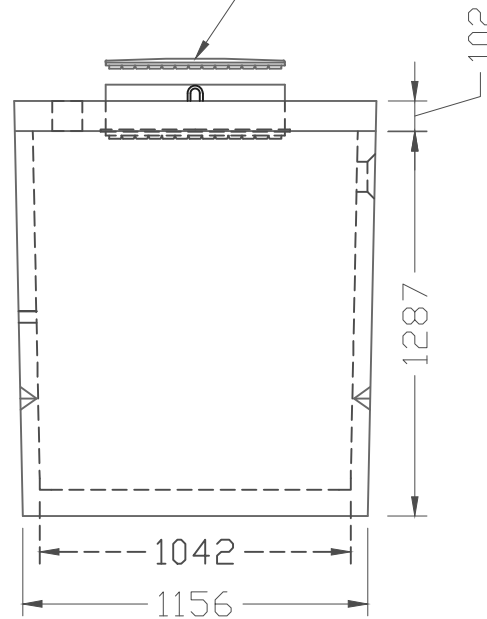

SIDE VIEW (2)

GENERAL:

ALL DIMENSIONS IN MILLIMETERS  
+/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:

STANDARD  
STANDARD ACC (ACCELERATED STRIPPING)  
10 MP<sub>a</sub> @ STRIPPING STRENGTH  
35 MP<sub>a</sub> @ 28 DAYS  
C-1 EXPOSURE CLASS  
SULPHATE RESISTANT  
5-7% AIR ENTRAINMENT  
0.97 CUBIC YARDS

REINFORCING:

ALL REINF. HAS MIN. 25mm OF COVER

TANK:

WWF 6"X6"  $\frac{3}{8}$ " (BOTTOM AND 3/4" OF SIDES)  
 $\frac{1}{4}$ " BAR X ON ALL SIDES  
 $\frac{1}{4}$ " BAR TOP RING

LID:

1- 10M RING  
4- 10M BARS LONG WAY  
2- 10M BARS SHORT WAY

WEIGHT:

APPROX. - 2886 LBS/1312 KG

NOTES:

JOINT SEALANT IS MASTIC SEALANT (CONCEAL CS-102)  
(NSF APPROVED SEALANT AVAILABLE FOR PORTABLE  
WATER HOLDING TANKS)  
TANK ASSEMBLED IN FACTORY  
1.5M MAXIMUM BURIAL  
INLETS ARE 4" POLYLOK PIPE SEALS  
LID AND RISER ARE 24" DIAMETER POLYLOK



PRODUCT:

270 GAL/1220 L PUMP TANK

PRODUCT ID:

PTC 270

CONTRACTOR:

SCALE:

N.T.S

REV	DATE	INI.	DESCRIPTION
0	03/23/ 20	LP	ORIGINAL DRAWING