



TOP VIEW

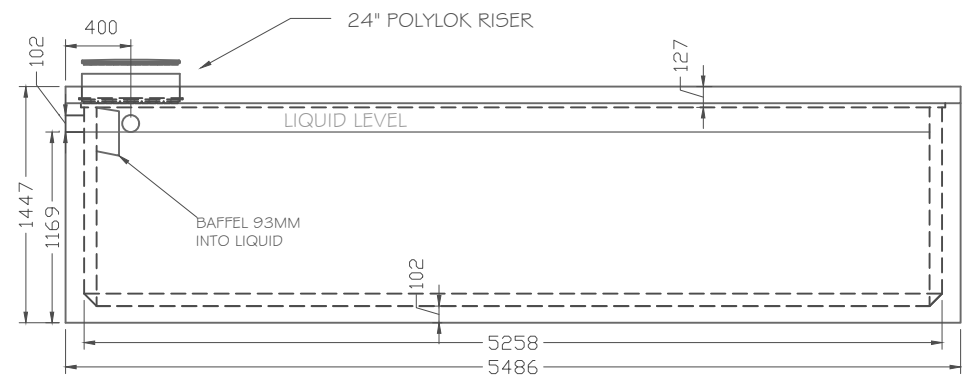

SIDE VIEW

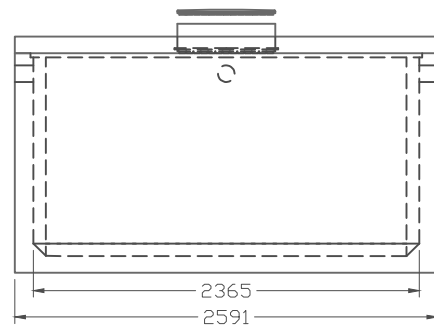

END VIEW

GENERAL:
 ALL DIMENSIONS IN MILLIMETERS
 +/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:
 STANDARD
 STANDARD ACC (ACCELERATED STRIPPING)
 10 MPa @ STRIPPING STRENGTH
 35 MPa @ 28 DAYS
 C-1 EXPOSURE CLASS
 SULPHATE RESISTANT
 6.2 CUBIC YARDS (TANK)

REINFORCING:
 ALL REINF. HAS MIN. 25mm OF COVER

TANK:
 10M @ 300mm O/C EW

LID:
 10M @ 300mm O/C EW
 CORNER BARS AROUND RISERS

WEIGHT:
 LID APPROX. - 9140 LBS/4155 KG
 TANK APPROX. - 17,959 LBS/8163 KG
 ASSEMBLED APPROX. - 27,099 LBS/12,318 KG

NOTES:
 JOINT SEALANT IS MASTIC SEALANT (CONCEAL CS-102)
 (NSF APPROVED SEALANT AVAILABLE FOR PORTABLE
 WATER HOLDING TANKS)
 TANK ASSEMBLED ON SITE
 1.5M MAXIMUM BURIAL
 INLETS ARE 4" POLYLOK PIPE SEALS
 LID AND RISER ARE 24" DIAMETER POLYLOK



PRODUCT: **2955 GAL/13,414 L HOLDING TANK**

PRODUCT ID: **HTC 2955**

CONTRACTOR:

SCALE: **N.T.S**

| REV | DATE | INI. | DESCRIPTION |
|-----|-----------|------|------------------|
| 0 | 03/23/ 20 | LP | ORIGINAL DRAWING |
| | | | |
| | | | |