



TOP VIEW

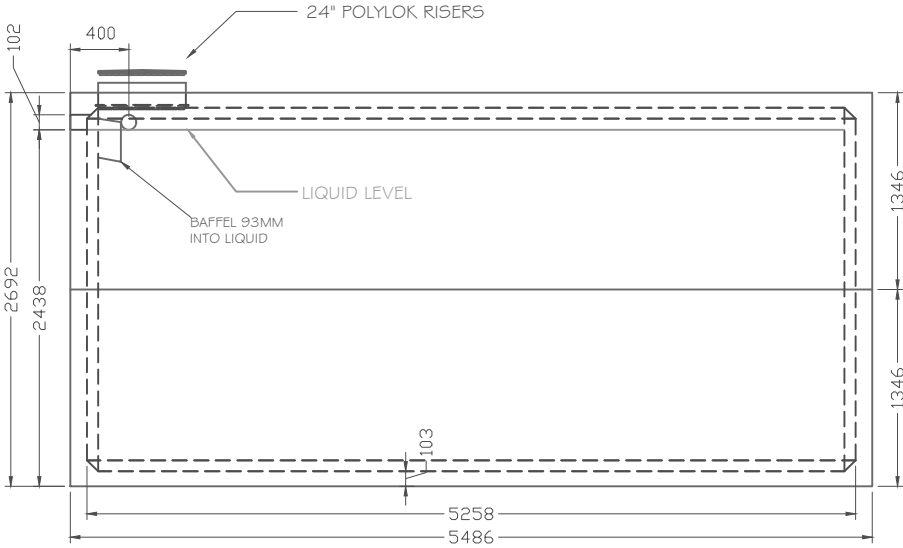

SIDE VIEW

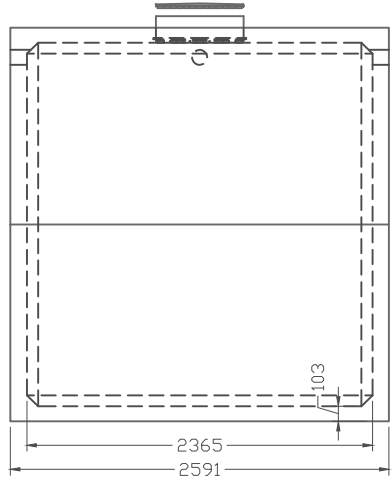

END VIEW

**GENERAL:**  
 ALL DIMENSIONS IN MILLIMETERS  
 +/- 10mm TOLERANCES ON ALL DIMENSIONS

**CONCRETE:**  
 STANDARD  
 STANDARD ACC (ACCELERATED STRIPPING)  
 10 MPa @ STRIPPING STRENGTH  
 35 MPa @ 28 DAYS  
 C-1 EXPOSURE CLASS  
 SULPHATE RESISTANT  
 6.7 CUBIC YARDS (TOP HALF)  
 6.7 CUBIC YARDS (BOTTOM HALF)

**REINFORCING:**  
 ALL REINF. HAS MIN. 25mm OF COVER  
 TANK:  
 10M @ 300mm O/C EW  
 LID:  
 10M @ 300mm O/C EW  
 CORNER BARS AROUND RISERS

**WEIGHT:**  
 TOP SECTION APPROX. - 17,599 LBS/7999 KG  
 BTM SECTION APPROX. - 17,772 LBS/8078 KG  
 ASSEMBLED APPROX. - 35,371 LBS/16,077 KG

**NOTES:**  
 JOINT SEALANT IS MASTIC SEALANT (CONCEAL CS-102)  
 (NSF APPROVED SEALANT AVAILABLE FOR PORTABLE  
 WATER HOLDING TANKS)  
 TANK ASSEMBLED IN FACTORY  
 1.5M MAXIMUM BURIAL  
 INLETS ARE 4" POLYLOK PIPE SEALS  
 LID AND RISER ARE 24" DIAMETER POLYLOK



PRODUCT:  
**6465 GAL/29,357 L HOLDING TANK**

PRODUCT ID:  
**HTC 6465**

CONTRACTOR:

SCALE:  
 N.T.S

REV	DATE	INI.	DESCRIPTION
0	03/23/ 20	LP	ORIGINAL DRAWING