



TOP VIEW

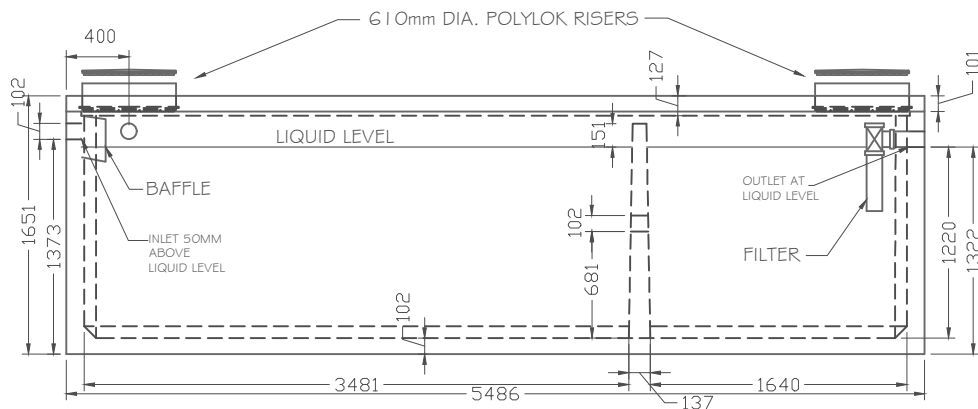

SIDE VIEW

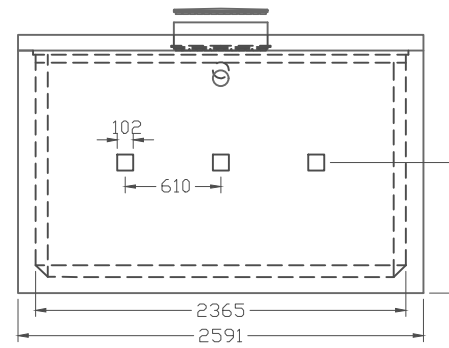

END VIEW

GENERAL:

ALL DIMENSIONS IN MILLIMETERS  
+/- 10mm TOLERANCES ON ALL DIMENSIONS

CONCRETE:

STANDARD  
STANDARD ACC (ACCELERATED STRIPPING)  
10 MP<sub>a</sub> @ STRIPPING STRENGTH  
35 MP<sub>a</sub> @ 28 DAYS  
C-1 EXPOSURE CLASS  
SULPHATE RESISTANT  
6.7 CUBIC YARDS (TANK)  
1.9 CUBIC YARDS (LID)

REINFORCING:

ALL REINF. HAS MIN. 25mm OF COVER

TANK:

10M @ 300mm O/C EW

LID:

10M @ 300mm O/C EW  
CORNER BARS AROUND RISERS

WEIGHT:

LID APPROX. - 9140 LBS/4155 KG  
TANK APPROX. - 21,520 LBS/9782 KG  
ASSEMBLED APPROX. - 30,660 LBS/13,937 KG

NOTES:

DIVIDER WALL IS MONOLITHIC CAST  
JOINT SEALANT IS MASTIC SEALANT (CONCEAL CS-102)  
(NSF APPROVED SEALANT AVAILABLE FOR PORTABLE  
WATER HOLDING TANKS)  
TANK ASSEMBLED ON SITE  
1.5M MAXIMUM BURIAL  
INLETS ARE 4" POLYLOK PIPE SEALS  
LID AND RISER ARE 24" DIAMETER POLYLOK



PRODUCT:

3310 GAL/15,013 L SEPTIC TANK

PRODUCT ID:

STC 3310

CONTRACTOR:

SCALE:

N.T.S

REV	DATE	INI.	DESCRIPTION
0	03/23/ 20	LP	ORIGINAL DRAWING